




JH011-1

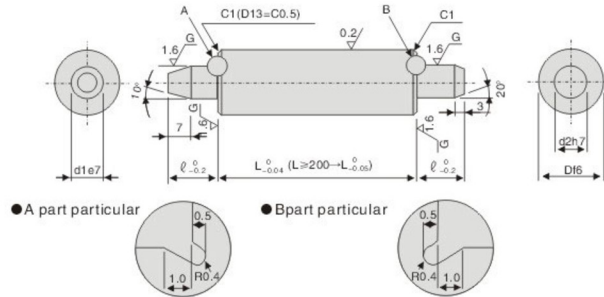

D	M x pitch	材質	硬度L寸法部	Heat Treatment
13 · 16	M6 x 1.0	SUJ2	HRC60 \pm 2°	熱處理 高周波 High Frequency
20 · 25	M8 x 1.25			
30 · 35 · 40	M10 x 1.5			

Df6	d1e7	d2h7	ℓ	Catalog No.		L		
				Type	D			
13	-0.016 -0.027	8	8	12	JH011-1 JH011-2	40-95		
16						13	100-125 130-150	
20	-0.020 -0.033	10	10	15		16	50-95 100-125 130-150	
25						20	100-125 130-150 50-95	
30	-0.040 -0.061	20	20	20		25	100-125 130-150 50-125 130-155 160-200	
35						40	30	205-230 235-260 265-300
40							35	50-125 130-155 160-200 205-230 235-260 265-300
50						(50)	40	90-125 130-155 160-200 205-230 235-260 265-300

備注：依來圖加工另行報價。
Remark: The price is per the provided drawing.