


無給油零件
Oil free components

石墨分布区
S: Graphite embedded area

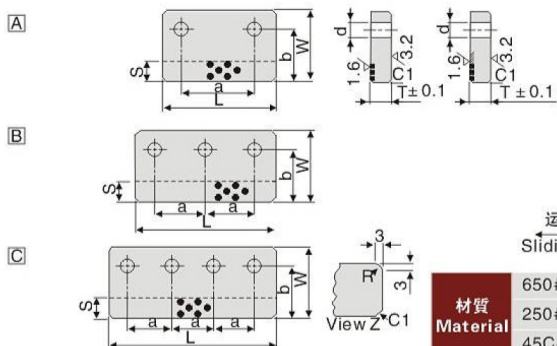

材質 Material	650#+Graphite(650#+石墨)
	250#+Graphite(FC250+石墨)
	45C+Graphite(45C+石墨)HRC>40

Catalog No.		L	T	a	b	d	S	Sketch 圖示	
Type	W								
JH116	70	160	25	110	50	18	25	A	
		200		75					
		240		90					
	85	200	28	75	60	22		30	B
		240		90					
		300		80					
JH116-1	70	160	25	110	50	18	25	A	
		200		75					
		240		90					
	85	200	28	75	60	22		30	B
		240		90					
		300		80					
	100	240	28	90	70	22	30	C	
		300		75					
		350		90					
		200		75				B	
		240		90					
		300		80				A	
JH116-2	70	160	25	110	50	18	25	A	
		200		75					
		240		90					
	85	200	28	75	60	22		30	B
		240		90					
		300		80					
	100	240	28	90	70	22	30	C	
		300		75					
		350		90					
		200		75				B	
		240		90					
		300		80				C	

●Order: Catalog No. $\overline{W} \times \overline{L}$

JH116以高力黃銅650#為基體，在其工作表面嵌入固體潤滑劑，JH116-1以FC250鑄鐵為基體，表面鑲嵌固體潤滑劑。JH116-2以45#碳鋼為基體，表面鑲嵌固體潤滑劑。
 JH116 use 650# as base material with solid lubricant. JH116-1use FC250 casting iron as base material with solid lubricant. JH116-2use 45#carbon steel as base material with solid lubricant.