





二次頂出 Z 1692 TWO-STAGE EJECTORS



方便安裝加工機械互鎖設計，安全可靠，安裝行程計算請需精準，否則產品易損壞，請根據模具荷重要求選擇適合的規格。

It is convenient for installing processing machinery interlocking design so that it is safe and reliable. The insealation stroke needs to be calculated accurately. Otherwise, the product is likely to be damaged. Select appropriate specification according to load requirement of the die.

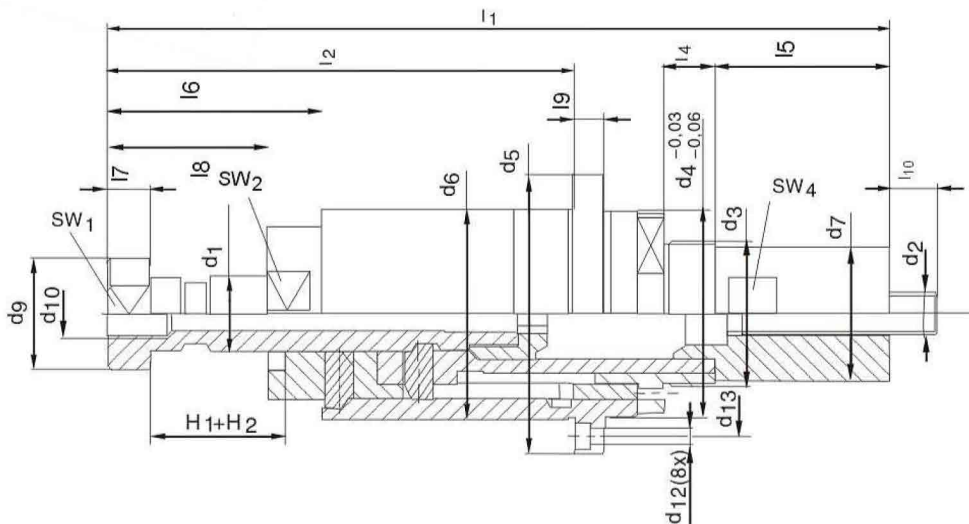

Type	SW ₁	SW ₂	SW ₄	d ₂	d ₃	d ₄	d ₅	d ₆	d ₇	d ₈	d ₁₀	d ₁₂	d ₁₃	l ₁	l ₂	l ₄	l ₅	l ₆	l ₇	l ₈	l ₉	l ₁₀	H _{max.}	d ₁	H ₁	單價 unit price
Z1692/25x45	32	50.2	38	M14x1	M48x1.5	69	93	70	45	37	M16	5.4	81	260	155	17	58	71	14	53	10	16	4-45	25	4-45	
32x60	41	60.2	46	M18x1	M58x1.5	80	110	82	55	46	M16	6.4	95	325	198	17	80	89	15	68	12	25	5-60	32	6-60	
40x80	50	80.2	65	M24x1.5	M76x1.5	106	140	108	73	56	M24	8.5	123	471	258	22	152	116	18	90	14	24	6-80	40	8-80	

Order: Type No. — d₁ x [h₁] x [Pcs]
Z1692 — 25 x 45 x 10

頂出系列
Ejector series