


A型灌嘴 SPRUE BUSHING A TYPE

塑膠模用
PLASTIC mold accessories

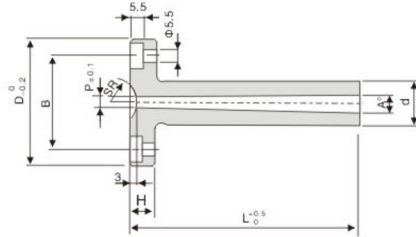

M材質	Inner Hardness	Surface Hardness	Heat Treatment
	I.H內部硬度	S.H表面硬度	熱處理
S45C	SR部HRC50° ~55°		局部處理 Partial
SKD11	HRC60°±2°	HRC60°±2°	真空處理 Vacuumed
SKD61	HRC36°±2°	HV1000°±100°	氮化處理 Nitrided
	HRC52°±2°	HRC52°±2°	真空處理 Vacuumed

d	B	採購代號 Catalog No.		H	L Appoint 0.01mm unit	SR	P	A	
		代號 Type	D 容許差 Tolerance						
35	25	JH025	12	0 -0.009	10	0 11 12 13	3.0 3.5 4.0	1°	
			16	0 -0.011	15				0~100.0
			20		20				
50	36		16	0 -0.013	10	0~150.0	4.5 5.0 0 11 12 13 16	2° 3°	
			20		15	0~180.0			
			25		20	0~200.0			

●Order: Catalog No. $\boxed{D} \times \boxed{d} \times \boxed{L} \times \boxed{SR} \times \boxed{P} \times \boxed{A} \times \boxed{H}$

備註：圖面以外之特殊規格可定制。
Remark: Special product is available.