


側開導引滑軌 GUIDE RAILS



塑膠模
具用

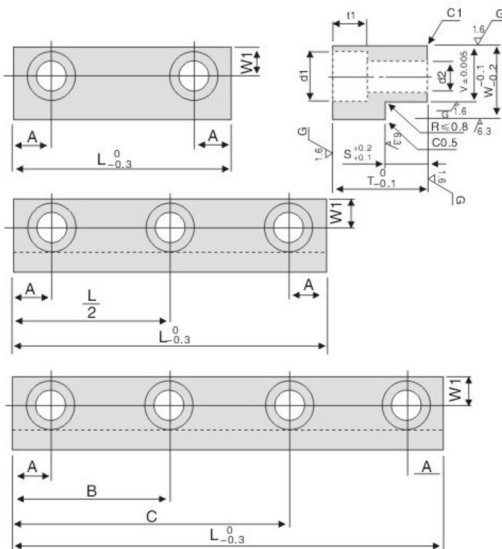

Material	Hardness	Heat Treatment
M材質	H硬度	熱處理
SKS3	HRC53~56°	真空處理 Vacuumed

Type	S	V	R
JH059-1	10		
JH059-2	12	(W-5)	R≤0.8
JH059-3	15		

■ 螺栓孔尺寸表 bolt hole's size

W	T	d1	d2	t1	W1
15	20 25	9.5	5.5	6	6
	20	11	6.5	7	9
20	25 30	14	9	9	9
	20 25 30	14	9	9	10

Catalog No.		T	L	Bolt hole No. 螺栓穴數	A	B	C
Type	W						
JH059-1 JH059-2 JH059-3	15	20	40 50 60	2	7.5	-	-
			70 80 90 100 110 120	3		-	-
			130	4		40	90
		140	45			95	
		150	53			97	
		20	20	40 50 60 70 80 90		2	10
	100 110 120 130 140 150			3	-	-	
	160			4	55	105	
	180		60		120		
	200		70		130		
	25		20	40 50 60 70 80 90	2	10	
		100 110 120 130 140 150		3	-		-
160		4		55	105		
180			60	120			
200			70	130			

● Order: Catalog No. \boxed{W} × \boxed{T} × \boxed{L}

備註：1.圖面以外之特殊規格可定制。
2.依客戶來圖報價。

Remark: 1.Special product is available.
2.The price is per the provided drawing.