




Material
材质
SUS416白铁

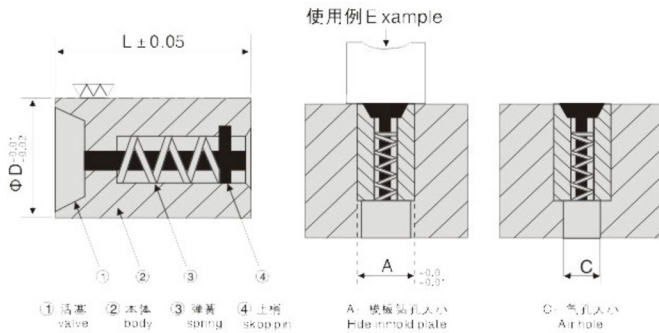

Type	$D_{+0.02}^0$	L	$A_{-0.01}^0$	C	Price 單價
JH072	8	15	8	4.5	
	10	20	10	6	
	12	25	12	8	
	16	30	16	10	
	20	30	20	12	
	25	30	25	15	
	30	30/55	30	20	

Order: Type[D]

另有其他多种规格可另外洽询 Kinds of other specification on request

说明:

1. 空气销用在有深度、密闭的真空状态下，顶针顶出困难时用之，且产品面积大，不容易脱落时，亦可采用之。
2. 本装置精度高，但装设很简单，且不占空间，而发挥的功能很大，为顶出装置改良之最佳利器。
3. 其原理为利用空气阀控制，封封闭型之产品之剥脱，以空气扩散之原理，使产品在瞬间，达到自动化之效果。
4. 本产品材质皆采用不锈钢制成，绝不生锈，请安心使用。
5. 消除模具在顶针设计上及制作过程之麻烦，以及化解在射出上之多故障性，实为模具界一大突破。

Details:

1. It's use in vacuumed condition in the deep and closed molds, or it can be used for having problems with ejection of ejector pins and for the larger size of final products, which has difficulty leaving the molds.
2. Easy installation high precision and space saver.
3. Using air valves to control the operation and the final products can leave the molds instantly.
4. Air-poppet valves are made from stainless steels and it will never rust.
5. Air-poppet valves are one of the most innovated tools for the molding industries. It will resolve the problems for molds design and injection troubles.